MODEL: **BaSix BSXJT700-TX-B-212D**

BASIX

Janitorial Sink. Stainless steel construction (700mm deep) with Reg4 certified monobloc mixer tap

Accreditation: Kiwa KUKreg4 1+
Basin Range: Janitorial Sink

FEATURES & BENEFITS

- Lift-out (removable) mop strainer.
- Waste fittings (excluding trap).
- Adjustable feet.
- Removable rear legs.
- Bracket supplied for easy installation on coved walls.

TECHNICAL INFO

- Dimensions: Hand-wash bowl: 430 (max) x 280 x 130 deep. Mop bowl: 400 x 400 x 200 deep.
- Product weight: 20.38kg
- Unit material 304 stainless steel
- Supplied with TX-B-212D Aquatechnix mixing tap
- Removable service panel on the front of the unit
- Feet adjustment can provide up to 60mm additional height
- Flow rates: standard diffuser 10.33 lpm water saving diffuser 3.56 lpm tested at 3 bar pressure

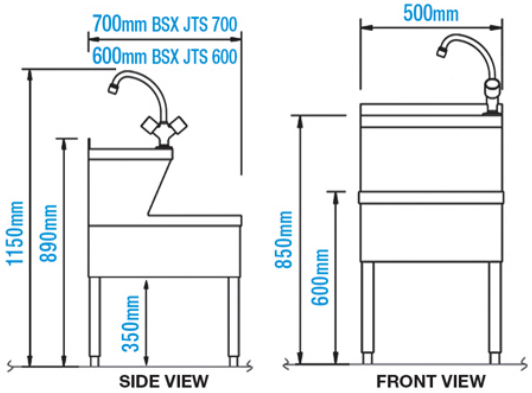

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.