



MODEL:

AquaJet AJ-B-3SG6L

# AQUAJET



AquaJet Twin Mixer Tap with Lever control and 150mm Swivel Gooseneck Spout

**Tap Hole Centres:** 170-230mm adjustable

**Accreditation:** Kiwa KUKreg4 1+

**Base:** AJ-B-30

**Connection(s):** ½-inch

**Controls:** Lever

**Model Range:** AquaJet 30

**Mount:** Deck mounted

**Pedestal:** Twin Hole

**Spout:** 150mm swivel gooseneck

**Tap Type:** Twin Mixer


**Water Feed:** Twin

## FEATURES & BENEFITS

- Comprehensive range of taps manufactured to meet the rigours of commercial catering.
- High quality, robust construction specifically designed for commercial kitchens.
- Easy lever operation.
- Selection of spouts to suit most applications.
- Spare parts available.

## TECHNICAL INFO

- Connection(s): ½-inch BSP male
- Height: 400mm
- Hole cut out requirement: 2x 22-27mm with 170-230mm centres
- Built-in non return valve
- Product material: nickel plated brass
- Product weight: 1.99kg
- Recommended working pressure: 1.5 - 5 bar
- Flow rates: 6.09 lpm tested at 3 bar pressure
- Certified to KUK Reg4 1+ by Kiwa
- Max recommended temperature 60°C

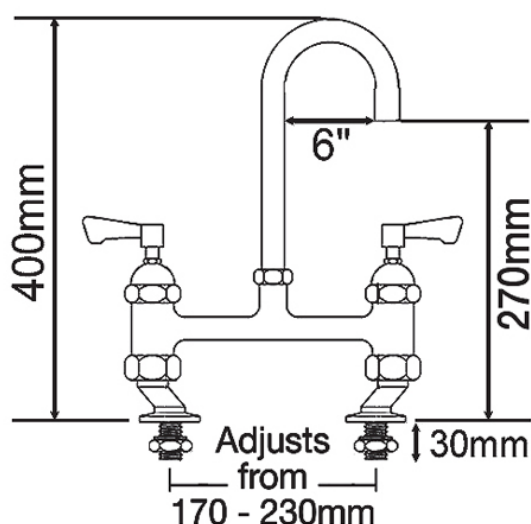

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)