MODEL: **AquaJet AJPR50-2**

AQUAJET




AquaJet 50 with STANDARD angled spray gun

FEATURES & BENEFITS

- Built-in water inlet valve.
- Integral restraining wire and gun hook for storage.
- Ideal for pre-rinsing dishes or rinsing and washing vegetables & other food (when connected to a potable water supply).
- Built in restraining device prevents the over-extension of hose into the dishwasher.
- Easy to clean, coiled hose absorbs the wear & tear from twisting the gun to spray dishes.
- Angled spray gun for easy use.
- Optional water-saving face plate. Save up to 47% in water costs!

TECHNICAL INFO

- Connection: ½-inch BSP female thread isolation valve inlet
- Mounting wall space requirement 135mm height 192mm width
- Total height: 800mm. 1120mm at full hose extension
- Product weight: 1.63kg
- Recommended dynamic water pressure range: 1.5 - 5 bar. Max hot water temperature 55°C
- Product material: ABS moulded cover with stainless steel back plate, stainless steel braided hose with EPDM lined inner hose interally and polyurethane swirl hose
- Flow rates tested at 3 bar dynamic pressure: 6.3 l/m
- 1 year parts warranty
- If this tap or combination tap is installed so that its base is no lower than the spillover level of the receiving vessel (for example, a sink or washbasin), a Type AUK3 air gap is achieved which permits installation of the tap in any premises where backflow protection up to Fluid Category 5 is required at the tap.

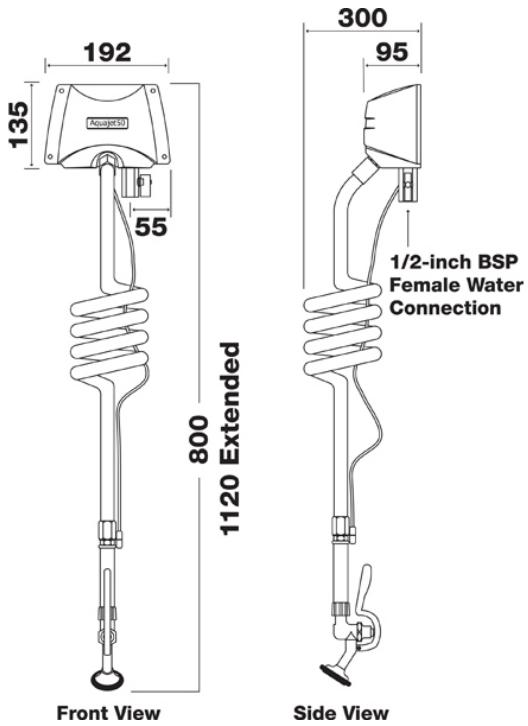

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.