



MODEL:

AquaJet AJPR50-2

# AQUAJET

AquaJet 50 with STANDARD angled spray gun




### FEATURES & BENEFITS

- Built-in water inlet valve.
- Integral restraining wire and gun hook for storage.
- Ideal for pre-rinsing dishes or rinsing and washing vegetables & other food (when connected to a potable water supply).
- Built in restraining device prevents the over-extension of hose into the dishwasher.
- Easy to clean, coiled hose absorbs the wear & tear from twisting the gun to spray dishes.
- Angled spray gun for easy use.
- Optional water-saving face plate. Save up to 47% in water costs!

### TECHNICAL INFO

- Connection: 1/2-inch BSP female thread isolation valve inlet
- Mounting wall space requirement 135mm height 192mm width
- Total height: 800mm. 1120mm at full hose extension
- Product weight: 1.63kg
- Recommended dynamic water pressure range: 1.5 - 5 bar. Max hot water temperature 55°C
- Product material: ABS moulded cover with stainless steel back plate, stainless steel braided hose with EPDM lined inner hose internally and polyurethane swirl hose
- Flow rates tested at 3 bar dynamic pressure: 6.3 l/m
- 1 year parts warranty
- If this tap or combination tap is installed so that its base is no lower than the spillover level of the receiving vessel (for example, a sink or washbasin), a Type AUK3 air gap is achieved which permits installation of the tap in any premises where backflow protection up to Fluid Category 5 is required at the tap.

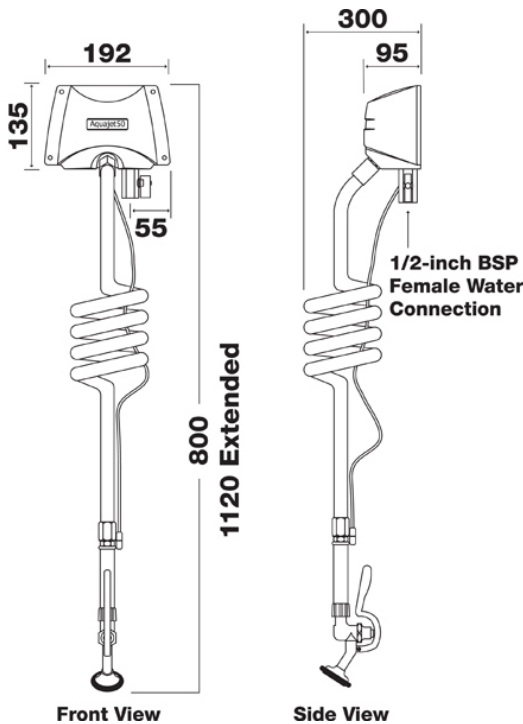

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)