



MODEL:

AquaTechnix TX-500BD

# AQUATECHNIX



AquaTechnix 1/2-inch Dome Head Basin Taps (pair) H: 130mm

**Accreditation:** Kiwa KUKreg4 1+

**Connection(s):** 1/2-inch

**Controls:** Dome

**Model Range:** TX-500

**Mount:** Deck mounted

**Pedestal:** Single Hole

**Tap Type:** Basin


**Water Feed:** Single

## FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models

## TECHNICAL INFO

- Connection: 1/2-inch
- Height: 130mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rate: for TX-500 basin tap models (tested at 3 bar pressure):  
Fitted with WATER-SAVING diffuser: 4.33 l/m Fitted with STANDARD diffuser: 10.91 l/m

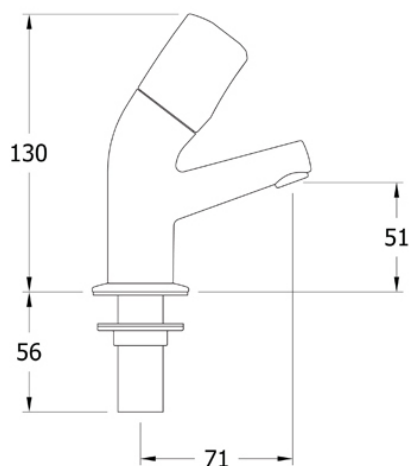

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)