



MODEL:

AquaTechnix TX-B-2DJ18D

AQUATECHNIX



AquaTechnix DOME head operated faucet TX-B-20 base with 450mm double jointed spout. H: 429mm


- Accreditation:** Kiwa KUKreg4 1+
- Base:** TX-B-20
- Connection(s):** ½-inch
- Controls:** Dome
- Model Range:** TX-20
- Mount:** Deck mounted
- Pedestal:** Single Hole
- Spout:** 450mm double jointed
- Tap Type:** Monobloc Mixer
- Water Feed:** Twin

FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models

TECHNICAL INFO

- Connection: ½-inch
- Height: 429mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-B-20 models - tested at 3 bar pressure: Fitted with WATER-SAVING diffuser: 3.56 l/m (INCLUDED) Fitted with STANDARD diffuser: 10.33 l/m

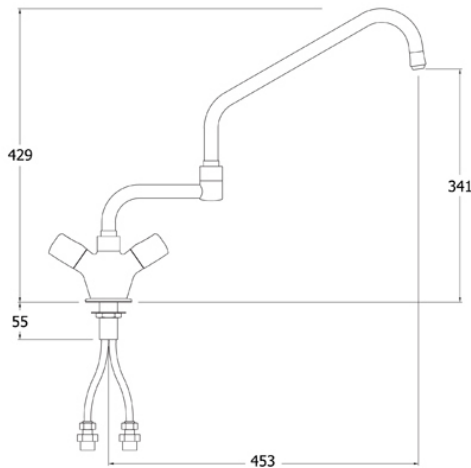

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com