



MODEL: AquaTechnix TX-PR-15L-SS-BF0

AQUATECHNIX


AquaTechnix Pre-Rinse Spray. LEVER operated TX-PR-15L base / SUPER SHORT height / No bowl filler H: 541mm

Accreditation: Kiwa KUKreg4 1+**Base:** TX-PR-15L**Bowl Filler:** No bowl filler (BF0)**Connection(s):** ½-inch**Controls:** Lever**Height:** Super Short**Model Range:** TX-15**Mount:** Panel mounted**Pedestal:** Single**Water Feed:** Single Monobloc**FEATURES & BENEFITS**

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models and Brass Back Nuts
- Choice of height and bowl filler available

TECHNICAL INFO

- Connection: ½-inch. 30mm maximum panel thickness
- Height: 541mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-PR-15 models - tested at 3 bar pressure:
 SPRAY GUN WATER-SAVING face plate: 4.11 l/m. SPRAY GUN STANDARD face plate: 10.84 l/m. BOWL FILLER WATER-SAVING diffuser: 3.71 l/m. BOWL FILLER STANDARD diffuser: 10.31 l/m.
 Water-saving diffuser for bowl filler included.

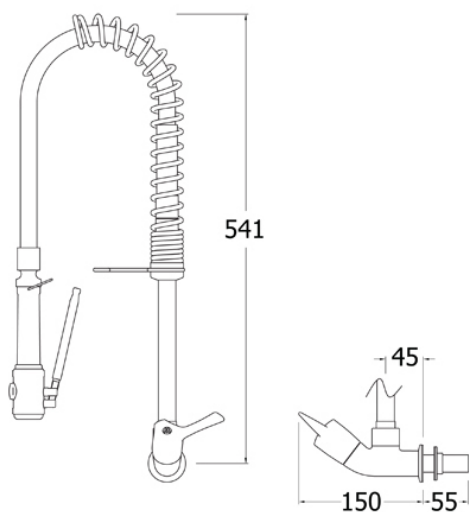

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com