



MODEL: AquaTechnix TX-PR-20D-SH-BF2

AQUATECHNIX



AquaTechnix Pre-Rinse Spray. DOME head operated TX-PR-20D base / SHORT height / BF2 bowl filler H: 877mm


- Accreditation:** Kiwa KUKreg4 1+
- Base:** TX-PR-20D
- Bowl Filler:** 300mm bowl filler (BF2)
- Connection(s):** ½-inch copper tail
- Controls:** Dome
- Height:** Short
- Model Range:** TX-20
- Mount:** Deck mounted
- Pedestal:** Single
- Water Feed:** Twin Monobloc

FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models and Brass Back Nuts
- Choice of height and bowl filler available

TECHNICAL INFO

- Connections: ½-inch copper tail
 - Height: 877mm
 - Recommended static water pressure range: 1.5 - 5 bar
 - Flow rates for all TX-PR-20 models - tested at 3 bar pressure:
 - SPRAY GUN WATER-SAVING face plate: 4.65 l/m.
 - SPRAY GUN STANDARD face plate: 7.75 l/m.
 - BOWL FILLER WATER-SAVING diffuser: 3.56 l/m.
 - BOWL FILLER STANDARD diffuser: 10.33 l/m.
- Water-saving diffuser for bowl filler included.

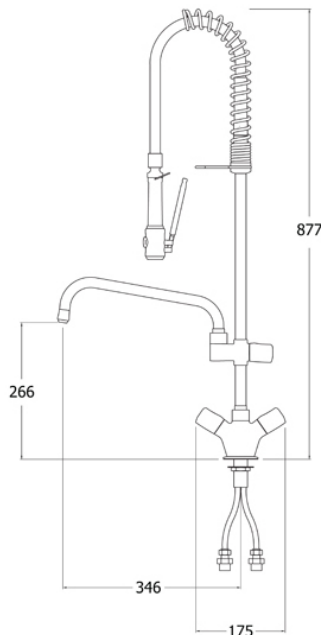

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com