



MODEL: AquaTechnix TX-PR-30D-ST-BF1

AQUATECHNIX



AquaTechnix Pre-Rinse Spray. DOME head operated TX-PR-30D base / STANDARD height / BF1 bowl filler H: 1187mm


**Accreditation:** Kiwa KUKreg4 1+  
**Tap Hole Centres:** 180mm  
**Base:** TX-PR-30D  
**Bowl Filler:** 150mm bowl filler (BF1)  
**Connection(s):** ½-inch  
**Controls:** Dome  
**Height:** Standard  
**Model Range:** TX-30  
**Mount:** Deck mounted  
**Pedestal:** Twin  
**Water Feed:** Twin

**FEATURES & BENEFITS**

- Ergonomic in design and functionality
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models and Brass Back Nuts
- Choice of height and bowl filler available
- Built in check valve for backflow protection
- Water saving options for spray gun and bowl filling spout included

**TECHNICAL INFO**

- Connections: ½-inch BSP 55mm length
- Hole cut out requirement 25-28mm x2 180mm centres
- Height: 1187mm
- Product weight: 5.18kg
- Recommended dynamic water pressure range: 1.5 - 5 bar. Max hot water temperature 60°C
- Flow rates for all TX-PR-30 models - tested at 3 bar dynamic pressure: SPRAY GUN WATER-SAVING face plate: 4.52 l/m. SPRAY GUN STANDARD face plate: 7.84 l/m. BOWL FILLER WATER-SAVING diffuser: 3.74 l/m. BOWL FILLER STANDARD diffuser: 9.33 l/m.
- 2 year parts warranty
- Certified to KUK Reg4 1+ by Kiwa
- If this tap or combination tap is installed so that its base is no lower than the spillover level of the receiving vessel (for example, a sink or washbasin), a Type AUK3 air gap is achieved which permits installation of the tap in any premises where backflow protection up to Fluid Category 5 is required at the tap
- Requires a balanced supply of hot and cold water with a difference no greater than 1 bar at the inlets

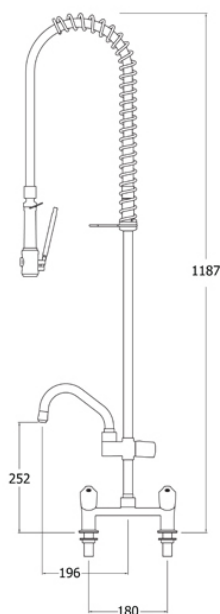

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)