



MODEL: AquaTechnix TX-PR-40L-ST-BF2

AQUATECHNIX

AquaTechnix Pre-Rinse Spray. LEVER operated TX-PR-40L base / STANDARD height / BF2 bowl filler H: 1142mm

Accreditation: Kiwa KUKreg4 1+

Tap Hole Centres: 180mm

Base: TX-PR-40L

Bowl Filler: 300mm bowl filler (BF2)

Connection(s): ½-inch

Controls: Lever

Height: Standard

Model Range: TX-40

Mount: Panel mounted

Pedestal: Twin


Water Feed: Twin Monobloc

FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models and Brass Back Nuts
- Choice of height and bowl filler available

TECHNICAL INFO

- Connections: ½-inch. 30mm maximum panel thickness
- Height: 1142mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-PR-40 models - tested at 3 bar pressure:
 SPRAY GUN WATER-SAVING face plate: 4.52 l/m. SPRAY GUN STANDARD face plate: 10.33 l/m. BOWL FILLER WATER-SAVING diffuser: 3.70 l/m. BOWL FILLER STANDARD diffuser: 9.55 l/m.
 Water-saving diffuser for bowl filler included.

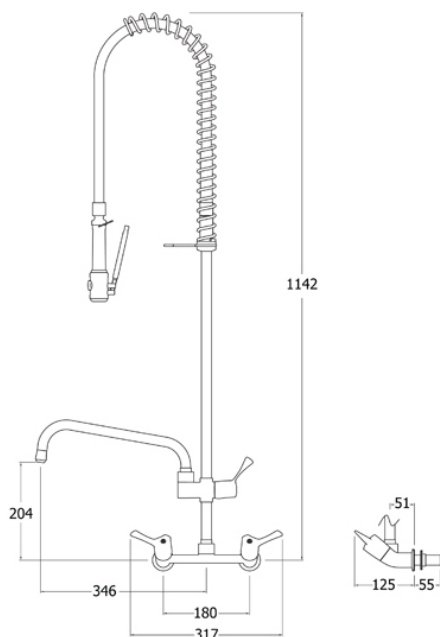

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com