



MODEL:

**AquaTechnix TX-W-408LF-E  
(150mm centres)**

# AQUATECHNIX

AquaTechnix LEVER operated faucet TX-W-40 base with 200mm low profile swivel spout. H 118mm. \*\*150MM CENTRES\*\*

**Accreditation:** Kiwa KUKreg4 1+

**Tap Hole Centres:** 150mm

**Base:** TX-W-40

**Connection(s):** ½-inch

**Controls:** Lever

**Model Range:** TX-40

**Mount:** Panel mounted

**Pedestal:** Twin Hole

**Tap Type:** Twin Mixer



**Water Feed:** Twin

### FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models
- Water saving diffuser included as standard

### TECHNICAL INFO

- Connection(s): ½-inch BSP male
- Height: 118mm
- Hole cut out requirement: 2x 22-27mm 180mm centres. Max panel/wall thickness 30mm
- Product material: nickel plated brass
- Product weight: 1.41kg
- Recommended working pressure: 1.5 - 5 bar
- Flow rates: standard diffuser 9.55 lpm water saving diffuser 3.7 lpm tested at 3 bar pressure
- Certified to KUK Reg4 1+ by Kiwa
- Max recommended temperature 60°C

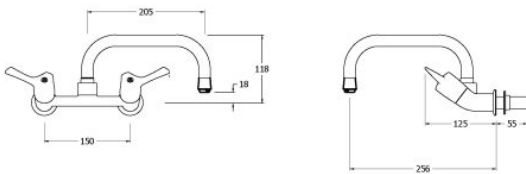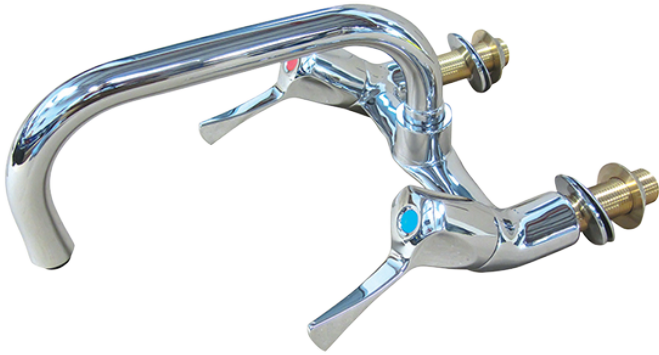

TX-W-408LF-E

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)