



MODEL:

**AquaTechnix TX-W-408LF-E
(150mm centres)****AQUATECHNIX**


AquaTechnix LEVER operated faucet TX-W-40 base with 200mm low profile swivel spout. H 118mm. **150MM CENTRES**

Accreditation: Kiwa KUKreg4 1+**Tap Hole Centres:** 150mm**Base:** TX-W-40**Connection(s):** ½-inch**Controls:** Lever**Model Range:** TX-40**Mount:** Panel mounted**Pedestal:** Twin Hole**Tap Type:** Twin Mixer**Water Feed:** Twin**FEATURES & BENEFITS**

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Heavy-duty construction incorporating high quality tested and proven components for commercial use.

TECHNICAL INFO

- Connections: ½-inch. 30mm maximum wall/panel thickness
- Height: 118mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-W-40 models - tested at 3 bar pressure:
Fitted with WATER-SAVING diffuser: 3.70 l/m (only available on request) Fitted with STANDARD diffuser: 9.55 l/m

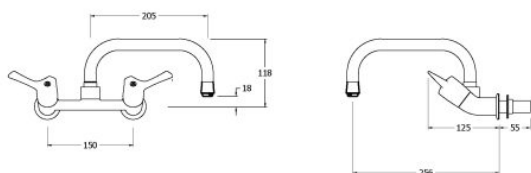

TX-W-408LF-E

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com