



MODEL:

AquaTechnix TX-W-4DJ18L

# AQUATECHNIX



AquaTechnix LEVER operated faucet TX-W-40 base with 450mm double jointed spout. H 368mm

**Accreditation:** Kiwa KUKreg4 1+

**Tap Hole Centres:** 180mm

**Base:** TX-W-40

**Connection(s):** ½-inch

**Controls:** Lever

**Model Range:** TX-40

**Mount:** Panel mounted

**Pedestal:** Twin Hole

**Spout:** 450mm double jointed

**Tap Type:** Twin Mixer


**Water Feed:** Twin

## FEATURES & BENEFITS

- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinses means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models

## TECHNICAL INFO

- Connections: ½-inch. 30mm maximum wall/panel thickness
- Height: 368mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-W-40 models - tested at 3 bar pressure:  
Fitted with WATER-SAVING diffuser: 3.70 l/m (INCLUDED) Fitted with STANDARD diffuser: 9.55 l/m

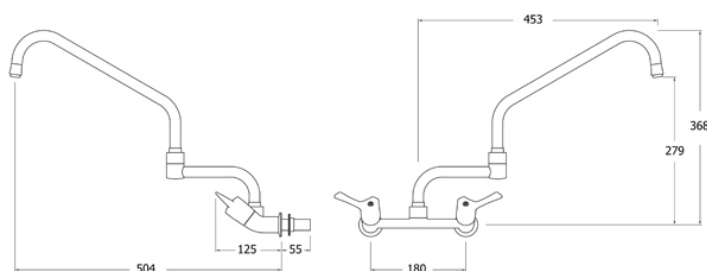

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)