



MODEL:

BaSix BSX-300-TX-i-200-WNT

**BASIX**



BaSix 300 Hand Wash Station. Hands-Free Operated with AquaTechnix TX-i-200 Electronic Sensor Tap. Includes microvalve, battery pack, 4x standard AA batteries, PEX lined water hose, WNT-MIX thermostatic mixer & tap hole stopper

Basin Range: BSX-300**Accreditation:** Kiwa KUKreg4 1+**Controls:** Hands-Free**Controls:** Hands-free ' Battery Operated'**Spout:** Fixed Spout**Tap Type:** TX-i**FEATURES & BENEFITS**

- Curved design ideal for commercial kitchens
- No sharp corners for kitchen staff to knock into
- Easy to clean integral flush grated waste reduces the risk of bacterial development
- Bowl and deck are permanently bonded to the skirt removing the need for exposed bolts and rivets
- High strength injection moulded skirt removes the possibility of cut hazards created by sharp stainless steel edge
- Mounting bracket with integral spirit level for fast and easy installation
- Optional waste bins can be fitted to all models
- Stylish, functional design.

TECHNICAL INFO

- Dimensions: O/D: 300 x 320 x 160mm Bowl: 260mm dia. X 130mm deep
- Flow rate range: Between 3.78 LPM (0.063 LPS) and 8 LPM (0.133 LPS) pressure dependent
- Basin material: Polycarbonate basin skirt with 304 stainless steel bowl
- One and one quarter inch drain waste fitting supplied
- Supplied with thermostatic mixing valve for hot & cold supplies with integrally fitted check valves
- Basin weight: 1.88kg
- Tap used on this basin is the TX-i-200
- TX-i Sensor Tap certified to KUK Reg4 1+ by Kiwa

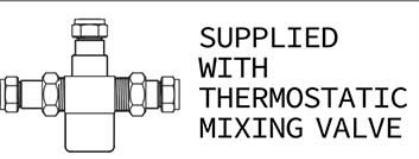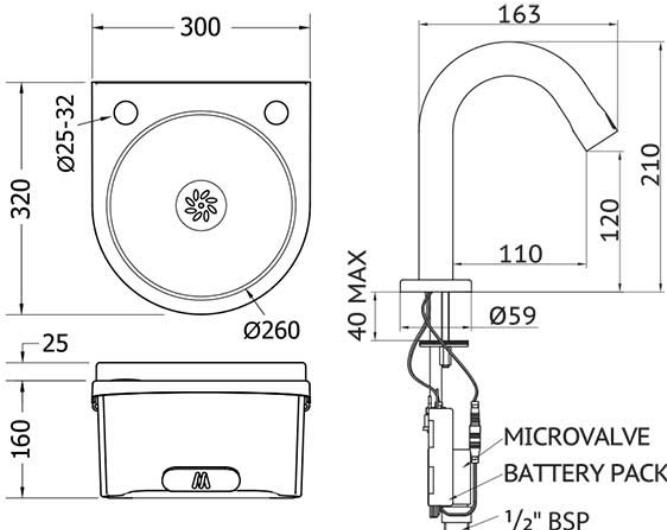

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com