MODEL: **CaterTap 500WX-COLD**

CATERTAP



CaterTap ½-inch Bib tap – COLD (sold individually)


Connection(s): ½-inch
Controls: Cross head
Mount: Panel mounted
Tap Type: Bib
Water Feed: Single

FEATURES & BENEFITS

- High-grade chrome-finished.
- Low maintenance and long lasting.
- Manufactured to British Standards.
- Robust commercial tap.
- Backed by Mechline's standard 1 year warranty.

TECHNICAL INFO

- Connection(s): ½-inch male thread.
- Worktop hole: 25mm.
- Recommended dynamic water pressure range: 1-5 bar.
- Flow rate: 13.04 lpm tested at 3 bar pressure
- Product material: Chrome plated brass
- Product weight: 0.32kg
- Max recommended temperature 60°C

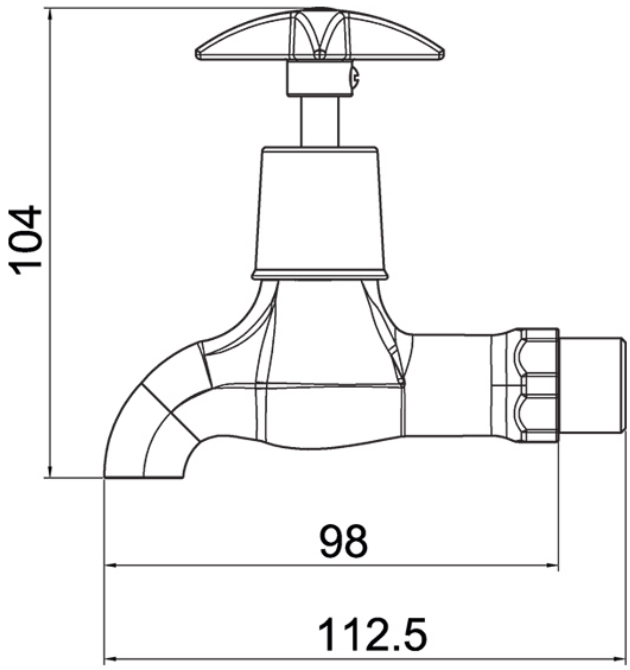

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.