

MODEL:

## CaterTap 500WX-HOT

## CATERTAP

CaterTap ½-inch Bib tap – HOT (sold individually)

Connection(s): ½-inch Controls: Cross head Mount: Panel mounted Tap Type: Bib Water Feed: Single




- High-grade chrome-finished.
- Low maintenance and long lasting.
- Manufactured to British Standards.
- Robust commercial tap.
- Backed by Mechline's standard 1 year warranty.

## **TECHNICAL INFO**

- Connection(s): ½-inch male thread.
- Worktop hole: 25mm.
- Recommended dynamic water pressure range: 1-5 bar.
- Flow rate: 13.04 lpm tested at 3 bar pressure
- Product material: Chrome plated brass
- Product weight: 0.32kg
- Max recommended temperature 60°C



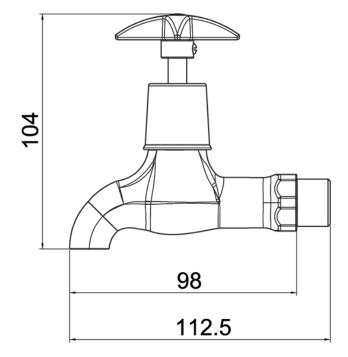

Dimensions are in millimeters. If a Cad file is required please visit <u>www.mechline.com</u>.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com