



MODEL:

CaterTap WRCT-500SL3**CATER****TAP**

CaterTap ½-inch Sink taps with 3-inch Levers


Accreditation: WRAS
Connection(s): ½-inch
Controls: 3-inch lever
Controls: Lever
Mount: Deck mounted
Tap Type: Sink
Water Feed: Single

FEATURES & BENEFITS

- WRAS approved.
- High-grade chrome-finished.
- Low maintenance and long lasting.
- Manufactured to British Standards.
- Robust commercial tap. Includes PosiStop protected lever and dome heads for long life and reliability for all models
- Backed by Mechline's standard 1 year warranty.

TECHNICAL INFO

- Connection(s): ½-inch.
- Worktop hole requirement: 22-28mm.
- Recommended dynamic water pressure range: 1-5 bar.
- Flow rate: 13.31 lpm tested at 3 bar pressure
- Product material: Chrome plated brass
- Product weight: 0.95kg
- Max recommended temperature 60°C

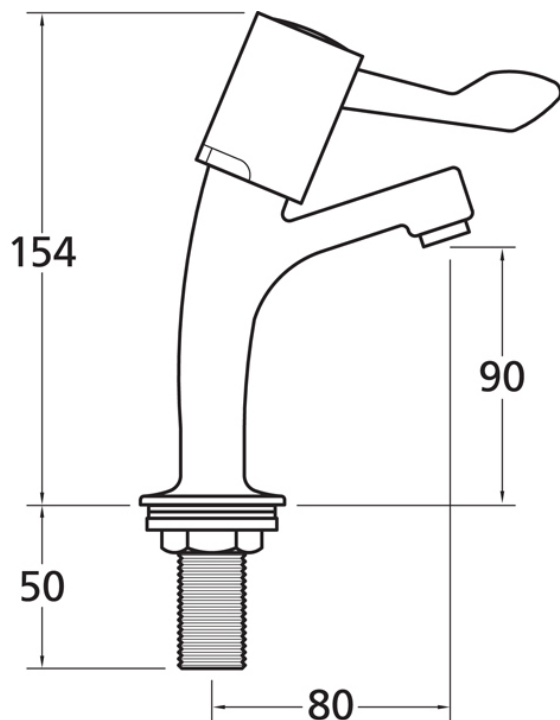

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com