MODEL: **Delabie DLB-734100**

DELABIE



TEMPOGENOU – Knee operated valve. Angled from the wall inlet


Accreditation: WRAS
Controls: Knee operated

FEATURES & BENEFITS

- Water savings up to 85%.
- Total hygiene: no manual contact.
- Time flow ~7 sec.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Control lever reinforced by an internal stainless steel rod.
- Fixing plate for wall mounting in solid brass, reinforced by 4 stainless steel screws.
- Cold or mixed water supply.

TECHNICAL INFO

- Connection(s): M½-inch.
- Length: 440mm
- Flow rate: 3 lpm, can be adjusted from 1.4 - 6 lpm
- Chrome plated brass fixing plate
- Time flow valve 7 seconds
- Fixing plate diamater 80mm
- Max recommended temperature 60°C
- Product weight:

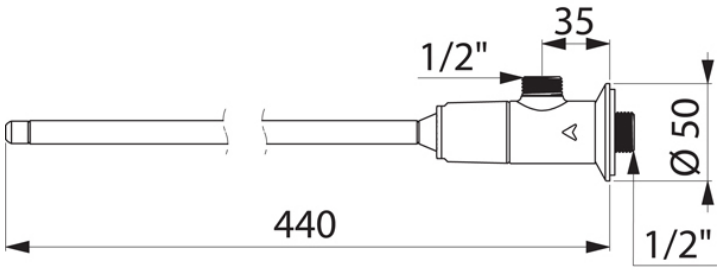

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.