



MODEL:

Delabie DLB-1470800

DELABIE



TEMPOGENOU – Knee operated valve. Straight type in line inlet/outlet

Accreditation: WRAS


Controls: Knee operated

FEATURES & BENEFITS

- Water savings up to 85%.
- Total hygiene: no manual contact.
- Time flow ~7 sec.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Control lever reinforced by an internal stainless steel rod.
- Solid brass wall plate with reinforced fixing via 4 stainless steel screws.
- Cold or mixed water supply.

TECHNICAL INFO

- Connection(s): M $\frac{1}{2}$ -inch.
- Length: 440mm
- Flow rate: 3 lpm, can be adjusted from 1.4 - 6 lpm
- Chrome plated brass fixing plate
- Time flow valve 7 seconds
- Fixing plate diameter 80mm
- Max recommended temperature 60°C
- Product weight: 0.44kg

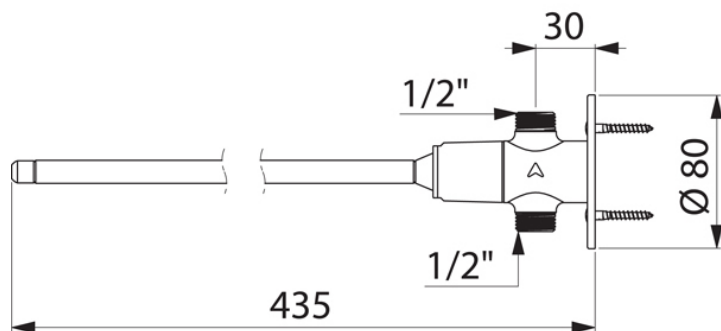

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com