



MODEL:

Delabie DLB-1481000

DELABIE



Delabie Temposoft 2 Time Flow Basin Control Tap, M $\frac{1}{2}$ -inch fixing with back nut

Accreditation: WRAS

Connection(s): $\frac{1}{2}$ -inch

Controls: Soft-touch

Mount: Deck mounted


Tap Type: Time flow

FEATURES & BENEFITS

- Deck-mounted time flow basin tap.
- Soft-touch operation.
- Water-savings up to 85%.
- WRAS-approved.
- Smooth design to significantly reduce the risk of bacterial development.
- Time flow 7 seconds.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Tamper proof scale-resistant flow straightener.
- Solid chrome-plated brass body.

TECHNICAL INFO

- Connection(s): M $\frac{1}{2}$ -inch.
- Worktop hole: 21-28mm.
- Drop height: 75mm.
- Spout length: 100mm.
- Flow rate: 3 lpm, can be adjusted from 1.4 - 6 lpm
- Product material: Chrome plated brass
- Time flow: 7 seconds
- WRAS approved
- Max recommended temperature 60°C
- Product weight: 0.57kg

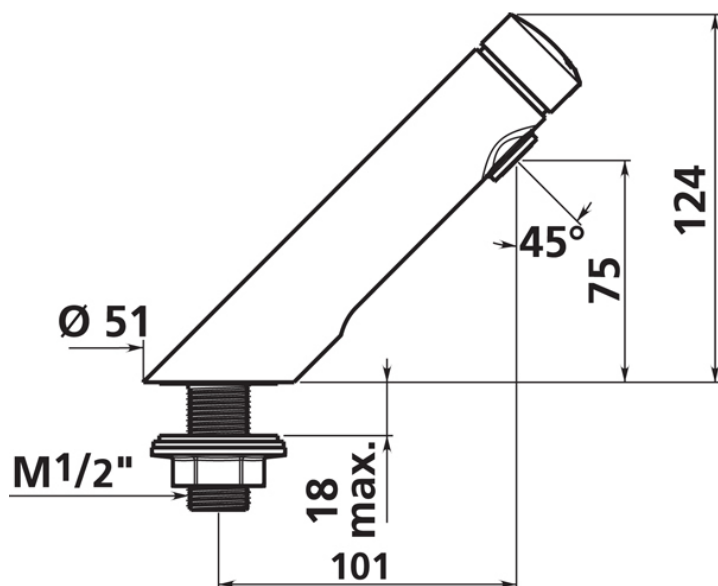

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com