



MODEL:

Delabie DLB-4892LS

# DELABIE



Delabie ½-inch mixer tap with lever control and swivelling, flat under-spout

**Connection(s):** ½-inch

**Controls:** Lever

**Mount:** Wall mounted

**Pedestal:** Twin Hole

**Spout:** Swivel

**Tap Type:** Monobloc Mixer


**Water Feed:** Twin

## FEATURES & BENEFITS

- Wall-mounted mechanical sink mixer.
- Swivelling, flat under-spout L. 200mm with hygienic flow straightener suitable for fitting a BIOFIL terminal filter.
- Securitouch thermal insulation prevents burns.
- Body and spout with smooth interiors and low water volume (reduce niches where bacteria can develop).
- Flow rate 5 lpm at 3 bar.
- Chrome-plated brass body.
- Hygiene control lever L. 150mm.
- Supplied with offset standard connectors, M½-inch M¾-inch.

## TECHNICAL INFO

- Connection(s): M½-inch.
- Spout length: 200mm.
- Flow rate regulated at 5 lpm.
- Max recommended temperature 60°C
- Recommended installation height 110-200mm above surface

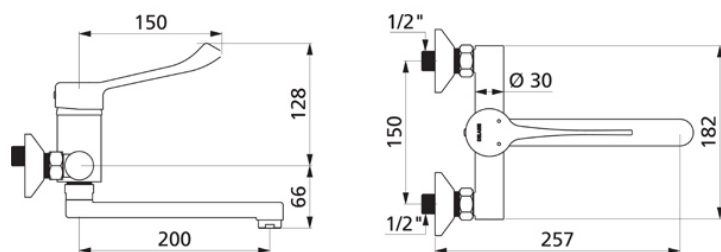

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)