


MODEL:

Delabie DLB-5012T4



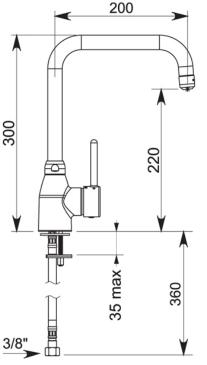

Dimensions are in millimeters. If a Cad file is required please visit <u>www.mechline.com</u>.

DELABIE

Delabie []-inch Mixer tap with Lever control and 200mm Swivel Spout OA 300mm

Connection(s): ½-inch Controls: Lever Mount: Deck mounted Pedestal: Single Hole Spout: 200mm swivel Tap Type: Monobloc Mixer Water Feed: Twin

FEATURES & BENEFITS

- Mechanical basin mixer with swivelling, tubular spout H. 220mm L. 200mm.
- High spout with BIOSAFE hygienic outlet suitable for fitting a BIOFIL terminal filter.
- Flow rate limited to 9 lpm at 3 bar.
- Slimline control lever.
- Without pop-up waste.
- Supplied with F[]Ó PEX stainless steel braided flexibles.
- Chrome-plated brass body with reinforced fixing via 2 stainless steel rods and back-nuts.

TECHNICAL INFO

- Connection(s): F[]-inch.
- Worktop hole: 34mm.
- Drop height: 220mm.
- Spout length: 200mm.
- Flow rate: 9 lpm.
- Product material: Chrome plated brass
- Max recommended temperature 60°C
- Supplied with PEX flexible hoses
- Product weight: 1.32kg



MECHLINE DEVELOPMENTS LIMITED Tel: <u>+44 (0)1908 261511</u> | Email: <u>info@mechline.com</u> | Web: <u>www.mechline.com</u>

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.