MODEL: **Delabie DLB-2506T3**

DELABIE



Delabie ½-inch Mixer tap with Lever control and 300mm Swivel Spout OA 400mm


Connection(s): ½-inch
Controls: Lever
Mount: Deck mounted
Pedestal: Single Hole
Spout: 300mm swivel
Tap Type: Monobloc Mixer
Water Feed: Twin

FEATURES & BENEFITS

- Deck mounted single hole mixer with swivelling, tubular spout H. 315mm L. 300mm.
- Star-shaped flow straightener.
- Flow rate set at 20 lpm at 3 bar.
- Spout with smooth interior.
- Slimline control lever.
- Chrome-plated body and spout with reinforced fixing via two stainless steel rods and back-nuts.
- Without pop-up waste.
- Body/spout with smooth interior reduces bacteria.
- Supplied with stainless steel braided PEX flexibles F½-inch.

TECHNICAL INFO

- Connection(s): F½-inch.
- Worktop hole: 34mm.
- Height: 380mm.
- Drop height: 315mm.
- Spout length: 300mm.
- Flow rate: 20 lpm.
- Product material: Chrome plated brass
- Max recommended temperature 60°C
- Supplied with PEX flexible hoses
- Product weight: 1.4kg

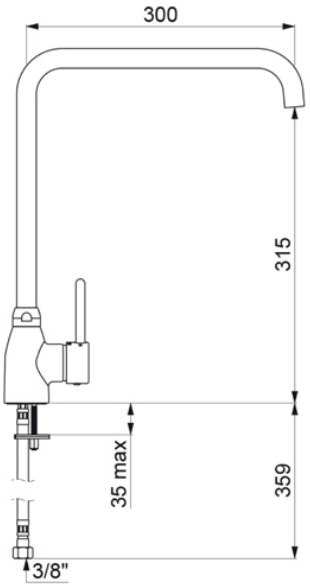

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.