



MODEL:

Delabie DLB-758D26

# DELABIE



BINOPTIC Cross wall electronic basin mixer. L 135mm spout for cross wall installation < 190mm, 15mm connector for compression fittings

**Accreditation:** WRAS

**Controls:** Mains supply

**Mount:** Panel mounted


**Tap Type:** Binoptic

## FEATURES & BENEFITS

- Independent IP65 electronic control unit.
- 230/12V mains supply with transformer.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Scale resistant flow straightener.
- Adjustable duty flush (pre-set flush ~60 sec. every 24hr after last use).
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- Filters and solenoid valves.
- Chrome-plated brass body and spout.
- Anti-blocking safety.
- Spout with smooth interior and low volume of water (reduces bacterial niches).
- Mixer valves can be fitted, if required.

## TECHNICAL INFO

- Connection(s): M $\frac{1}{2}$ -inch.
- Drop height: 90mm.
- Spout length: 135mm for cross wall installation <190mm
- Flow rate: 3 lpm can be adjusted from 1.4 - 6 lpm
- Product weight: 1.1kg
- Mixing valve required for mixed supply
- 230/12v mains supply with transformer
- Product material: Chrome plated brass body with PEX flexible hoses
- Independent IP65 electronic control unit
- CE approval
- WRAS approved

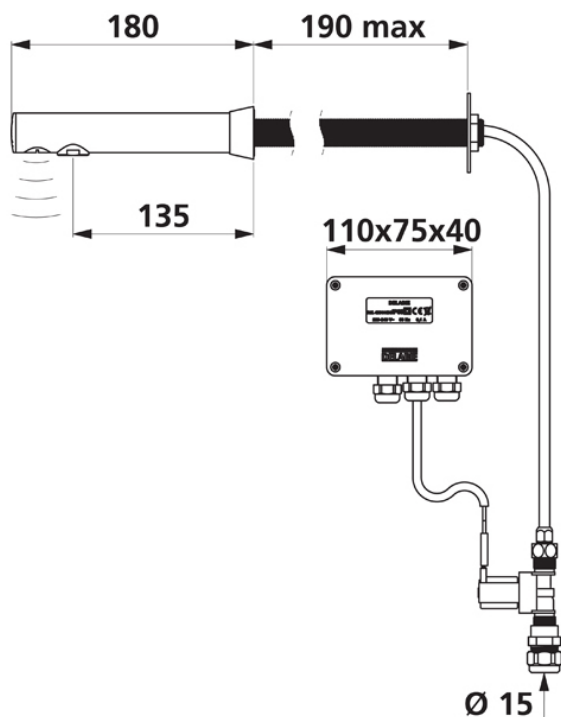

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)