



MODEL:

Delabie DLB-886012

# DELABIE



TEMPOMATIC 3 Wall mounted electronic basin tap


**Accreditation:** WRAS  
**Controls:** Battery operated  
**Mount:** Wall mounted  
**Tap Type:** Tempomatic 3

### FEATURES & BENEFITS

- Battery operated with integrated 223 6V Lithium battery.
- Reduced stagnation solenoid valve and electronic unit integrated into the body of the tap.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Scale resistant flow straightener.
- Duty flush (~60 sec. every 24hr after last use).
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- Chrome-plated solid brass body.
- Cap fixed in place by 2 concealed screws, with pictogram to identify the sensor easily.
- O 50mm L. 190mm.
- Anti-blocking safety.

### TECHNICAL INFO

- Connection(s): M $\frac{1}{2}$ -inch.
- Spout length: 190mm.
- Flow rate: 3 lpm.

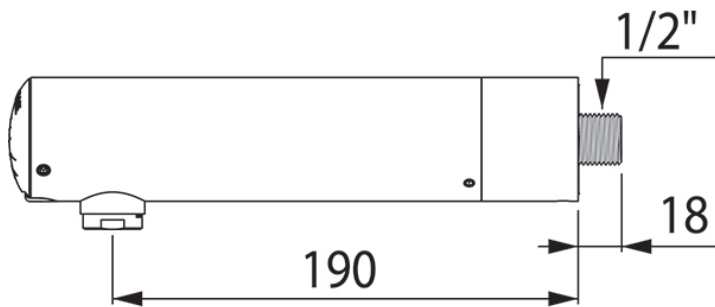

Dimensions are in millimeters. If a Cad file is required please visit [www.mechline.com](http://www.mechline.com).



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)