



MODEL:

**Dormont 2675NPVF362S**



Dormont UNBRAIDED 3/4-inch 1000mm Gas Hose "NPVF" + Quick-Disconnect Coupling + 2 SwivelMax + Straight Restrainer Cable with mounting hardware

**Accreditation:** BS669-2:1997

**Connection(s):** 3/4-inch

**Hose Length:** 1000mm


**Hose Type:** Unbraided "NPVF"

**FEATURES & BENEFITS**

- SwivelMAX provides unique multi-plane rotational movement to increase aisle space in the kitchen; decreases stress on the hose and thereby increase the service life of the hose. Maximise performance, mobility, space & safety. Can be fitted to standard or braided gas hoses as part of the original assembly. Cannot be retro-fitted.
- Dormont gas hoses are of the highest quality and reliability with safety features built in.
- Fit & Forget saving time and money.
- Designed with safety and long-life in mind.
- Approved for both gas families: LPG & Natural Gas.
- Push-to-connect, Flat-Faced Quick Disconnect Coupling.
- Designed for catering applications.
- 304 Stainless Steel, Helically formed hose - flexible and strong.
- Flared-end Mechanical fittings - for strength & reliability.
- All Hoses Annealed - to increase flexibility & corrosion resistance.
- PVC dipped coating - wrinkle free, easy to clean & durable.
- Antimicrobial coating - to resist build up of bacteria for hygiene.
- Full assembly and product testing carried out by Mechline, U.K.

**TECHNICAL INFO**

- Length: 1000mm
- Connection Size: 3/4-inch
- Hose BTU Flow Rating at 0.55 sp. Gr. Natural Gas, 0.58mbar Pressure Drop, 37.96 MJ/m<sup>3</sup> - 152000
- Flow rating BTU @ 0.22sp LPG-Propane gas 0.58mbar pressure drop, 95MJ/m<sup>3</sup> - 380000
- Flow rating BTU @0.17sp LPG-Butane gas 0.58mbar pressure drop, 121MJ/m<sup>3</sup> - 380000

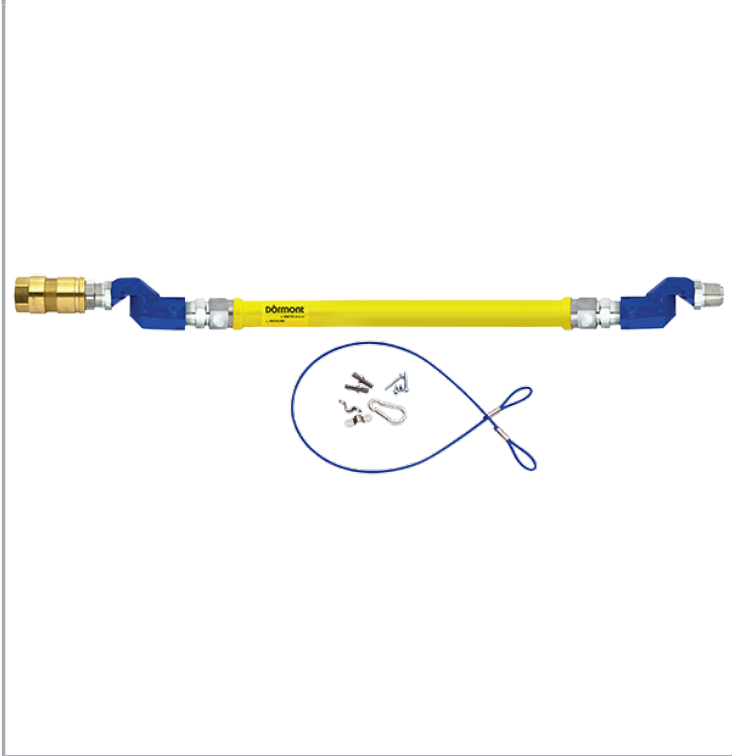

MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: [info@mechline.com](mailto:info@mechline.com) | Web: [www.mechline.com](http://www.mechline.com)