


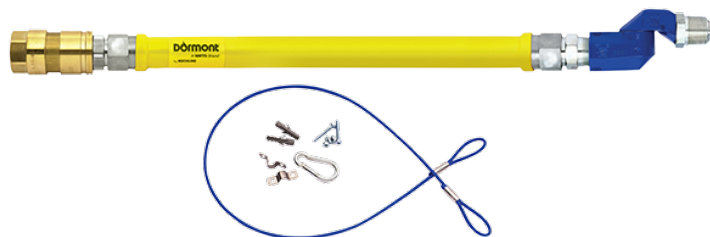

MODEL:

Dormont 2675NPVF481S

Dormont UNBRAIDED $\frac{3}{4}$ -inch 1200mm Gas Hose "NPVF" + Quick-Disconnect Coupling + 1 SwivelMax + Straight Restrainer Cable with mounting hardware

Accreditation: BS669-2:1997

Connection(s): $\frac{3}{4}$ -inch

Hose Length: 1200mm

Hose Type: Unbraided "NPVF"

FEATURES & BENEFITS

- SwivelMAX provides unique multi-plane rotational movement to increase aisle space in the kitchen; decreases stress on the hose and thereby increase the service life of the hose. Maximise performance, mobility, space & safety. Can be fitted to standard or braided gas hoses as part of the original assembly. Cannot be retro-fitted.
- Dormont gas hoses are of the highest quality and reliability with safety features built in.
- Fit & Forget saving time and money.
- Designed with safety and long-life in mind.
- Approved for both gas families: LPG & Natural Gas.
- Push-to-connect, Flat-Faced Quick Disconnect Coupling.
- Designed for catering applications.
- 304 Stainless Steel, Helically formed hose - flexible and strong.
- Flared-end Mechanical fittings - for strength & reliability.
- All Hoses Annealed - to increase flexibility & corrosion resistance.
- PVC dipped coating - wrinkle free, easy to clean & durable.
- Antimicrobial coating - to resist build up of bacteria for hygiene.
- Full assembly and product testing carried out by Mechline, U.K.

TECHNICAL INFO

- Length: 1200mm
- Connection Size: $\frac{3}{4}$ -inch
- Hose BTU Flow Rating at 0.55 sp. Gr. Natural Gas, 0.58mbar Pressure Drop, 37.96 MJ/m³ - 142000
- Flow rating BTU @ 0.22sp LPG-Propane gas 0.58mbar pressure drop, 95MJ/m³ - 355000
- Flow rating BTU @ 0.17sp LPG-Butane gas 0.58mbar pressure drop, 121MJ/m³ - 355000



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com