
MODEL: **HyGenikx HGX-AF-25**

HYGENIKX+



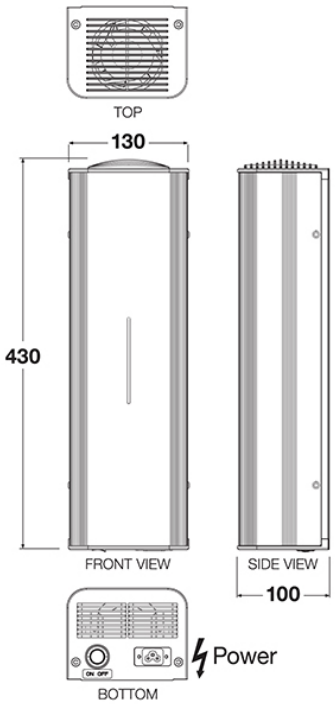

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

HyGenikx AF Air & Surface Hygiene Sanitiser for larger occupied areas. Up to 25m² coverage. Silver finish. Fan operation.

Area of Use: Larger Occupied areas
Colour finish: Aluminium
Range of Cover: 25m²

FEATURES & BENEFITS

- 24/7 infection control
- Kills Escherichia coli (E. coli), Staphylococcus aureus (S. aureus), Clostridium difficile (C. difficile), Aspergillus fumigatus, and other primary sources of infections
- Significantly improves hygiene standards to levels impossible to maintain with traditional cleaning methods alone
- Eradicates unpleasant odours by tackling them at source
- Eliminates bacteria, viruses, moulds, fungi and volatile organic compounds (VOCs), both in the air and on exposed surfaces, even in the hardest to reach places
- Safe to use & for the environment
- Improves infection control for staff and visitors
- Reduces staff absenteeism
- Annual lamp change to maintain optimum performance
- Wall or ceiling mountable with four screws. Alternatively place flat on supplied rubber feet on a high surface
- Utilises a combination of the most effective air and surface sterilisation technologies available
- Power via a plug* that allows flexible installation and easy connection to an existing isolated plug socket or to a switched fused spur
- Robust vandal resistant aluminium outer casing

TECHNICAL INFO

- Combines technologies: Germicidal Oxidation, Germicidal Irradiation, Dual waveband Plasma Quattro
- 220-230V, 50/60Hz, 33W, 1Ph+N+E. Uninterrupted supply – 24 hour operation required. High level
- 1.8m Cloverleaf power lead with plug* to be connected to suitably isolated socket or switched fused spur (with dedicated Earth)
- Fan is shielded behind a protective end cap to avoid potential injury
- SGS Certified
- CE mark
- Low Voltage Directive (LVD) 2014/35/EU: EN60335-2-65:2003+A1:2008+A11:2012 EN60335-1:2012+A11:2014
- Electromagnetic Compatibility Directive (EMC) 2014/30/EU: EN55014-1:2017, EN61000-3-2:2014, EN610000-3-3:2013, EN55014-2:2015
- Manufactured in accordance with European standards
- Produced under the control of our comprehensive BSI ISO 9001:2015 Quality Management System (certificate FS 616985)
- Class I certified for electrical insulation

MECHLINE

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.