



MODEL: **TX-PR-10D-SH-BFO**

AQUATECHNIX

manufactured by **MECHLINE**

AquaTechnix Pre-Rinse Spray. DOME head operated
TX-PR-10D base / SHORT height / No bowl filler H: 745mm

Manufacturer: Mechline Developments

Brand: AquaTechnix

Model Range: TX-10

Base: TX-PR-10D

Height: Short

Bowl Filler: No bowl filler (BFO)

Pedestal: Single

Mount: Deck mounted

Water Feed: Single Monobloc

Controls: Dome


Accreditation: WRAS

FEATURES & BENEFITS

- Ergonomic in design and functionality.
- PosiStop™ patented built-in stopping device which prevents the lever or handle from being turned or knocked too far and transferring stress to the tap valve.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinse means that product use can easily be changed on site at a later date.
- Heavy-duty construction incorporating high quality tested and proven components for commercial use.
- Choice of height and bowl filler available.

TECHNICAL INFO

- Connection: 1/2-inch
- Tap hole Ø 25mm
- Height: 745mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-PR-10 models - tested at 3 bar pressure:
 - SPRAY GUN WATER-SAVING face plate: 4.11 l/m.
 - SPRAY GUN STANDARD face plate: 10.33 l/m.
 - BOWL FILLER WATER-SAVING diffuser: 3.82 l/m.
 - BOWL FILLER STANDARD diffuser: 10.33 l/m.
- Water-saving diffuser for bowl filler available on request.

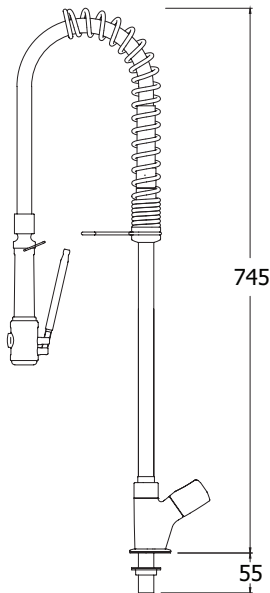

MAINTENANCE & CLEANING

Cleaning chrome: Do not use abrasive, chlorine or acid-based cleaning products. Avoid contact with concentrated bleach. Clean with soapy water using a cloth or sponge.

Dimensions are in millimeters. If a CAD file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com