MODEL: **Delabie DLB-495253**

DELABIE



TEMPOMATIC MIX PRO – electronic basin mixer with swivel spout; mains power supple 230/12v w/transformer


Controls: Mains supply
Mount: Deck mounted
Tap Type: Tempomatic Mix Pro

FEATURES & BENEFITS

- Removable swivel spout.
- L200 H310.
- Infra-red presence detection.
- Flow straightener set at 3lpm at 3 bar. Can be adjusted if pressure < 3 bar.
- PEX flexibles with filters and solenoid valves M½-inch.
- Chrome-plated brass body with reinforced fixings.
- Separated IP65 electronic control unit.
- Automatic duty flush (for ~60 seconds 24 hours after the last use).
- Two shut off modes available: >Standard mode: timed flow with automatic shut-off. >ON/OFF mode: voluntary shut-off or after 30 minutes of flow.

TECHNICAL INFO

- Connection(s): M□-inch.
- Drop height: 310mm.
- Spout length: 200mm.
- Flow rate: 3 lpm.

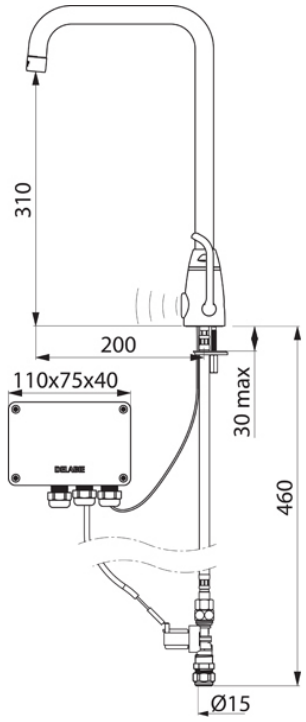

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.

MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com

©2019 All rights reserved. All material on these pages, including and without limitation text, logos, icons, photographs and all other artwork, is copyright material of Mechline Developments Ltd, unless otherwise stated. Commercial use of this material may only be made with the express, prior, written permission of Mechline. This includes material provided by any third party, including material obtained through links to other sites from Mechline's pages or its af liates and commercial associates. Material and information included are correct at time of print. Intending buyers and users must satisfy themselves as to the suitability and safety of the products for their particular purposes and duties. Dimensions shown in mm unless otherwise stated. Product accreditation may not apply to all products in the relevant range. Please contact Mechline to con rm. Unless otherwise stated, all products carry a warranty of twelve (12) months against manufacturing defect or workmanship on parts with no inclusion for labour or site attendance.